



Chore Master®

PARTS LIST FOR
CM-2600-0MLB
CM-2600-CMLB

Displacement:	208 cc
Pump Oil Grade:	Mi-T-M Pump Oil AW-4085-0016
Pump Oil Capacity:	5.0 oz.
Nozzle Size:	# 3.0

For parts Call 888-279-9274

This Parts Listing has been compiled for your benefit. You can be assured your cold water pressure washer was constructed and designed with quality and performance in mind. Each component has been rigorously tested to insure the highest level of quality.

The contents of this Parts Listing are based on the latest product information available at the time of publication. Mi-T-M reserves the right to make changes in price, color, materials, equipment, specifications or models at any time without notice.

WARNING

THIS IS A PROFESSIONAL HIGH PRESSURE, COLD WATER PRESSURE WASHER. CAUTION SHOULD BE OBSERVED WHEN USING OR REPAIRING THIS UNIT! READ AND FOLLOW THE SAFETY WARNINGS LISTED BELOW BEFORE ATTEMPTING ANY REPAIRS ON THIS PRESSURE WASHER!

SAFETY WARNINGS

- 1. NEVER alter or modify the equipment. Be sure any accessory items and system components being used will withstand the pressure developed. Use only genuine manufacturer parts for repair of your pressure washer. Failure to do so can cause hazardous operating conditions and will VOID warranty.
- 2. NEVER make adjustments on machinery while the unit is connected to the engine without first removing the ignition cable from the spark plug. Turning over the machinery by hand during adjustment or cleaning might start the engine and machinery with it, causing serious injury to the operator.
- 3. Know how to stop and bleed pressures quickly. Be thoroughly familiar with controls.
- 4. Before servicing the unit, turn unit off, relieve the water pressure and allow the unit to cool down. Do not make repairs while the unit is running. Service in a clean, dry, flat area. Block the wheels to prevent the unit from moving. Be especially careful to properly dispose of any flammable materials.
- 5. After testing the machine, DO NOT leave the pressurized unit unattended. Shut off the unit and release trapped pressure before leaving.

Table of Contents

SPECIFICATIONS.....3

FRAME ASSEMBLY FOR CM-2600-0MLB / CM-2600-CMLB4

MOTOR / PUMP ASSEMBLY (3-0311).....6


SPECIFICATIONS

CM-2600-0MLB

MODEL NUMBER	CM-2600-0MLB / CM-2600-CMLB
Operating Pressure (PSI/Bar):	2600/179.5
High Pressure Nozzle:	3.0
Water Volume (GPM/lpm):	2.4/9.1
Engine:	LCT
Displacement (cc)	208
Engine Type	4 Stroke, Overhead Valve, Single Cylinder
Oil Type	SAE10W-30
Oil Capacity (oz./liters)	20/6
Fuel Type	Unleaded Gasoline 86 Octane Minimum
Fuel Capacity (gallon/ liters)	.95/3.6
Starting	Recoil
Maximum No Load RPM	3700 (+/- 100) RPM
Pump:	Axial Direct Driven, Oil Bath, Triplex Piston
Oil Type	Mi-T-M Pump Oil AW-4085-0016
Oil Capacity (oz./liters)	5.0/0.15
Plungers	Ceramic Coated
Manifold	Forged Brass
Valves	Stainless Steel
Unloader	Preset
Detergent Injector	Low pressure downstream from pump
Unit Net Weight (lbs/Kg)	75/34
Unit Shipping Weight (lbs/Kg)	100/45.3
Unit Net Dimension (cm)	37Lx21Wx24.5H/ 94Lx53.5Wx62.5H
Unit Shipping Dimension (cm)	30.5Lx21.5Wx28.5H/ 77.5Lx55Wx72.5H
	*Shipped without handle attached.

FRAME ASSEMBLY FOR CM-2600-0MLB / CM-2600-CMLB

For parts Call 888-279-9274

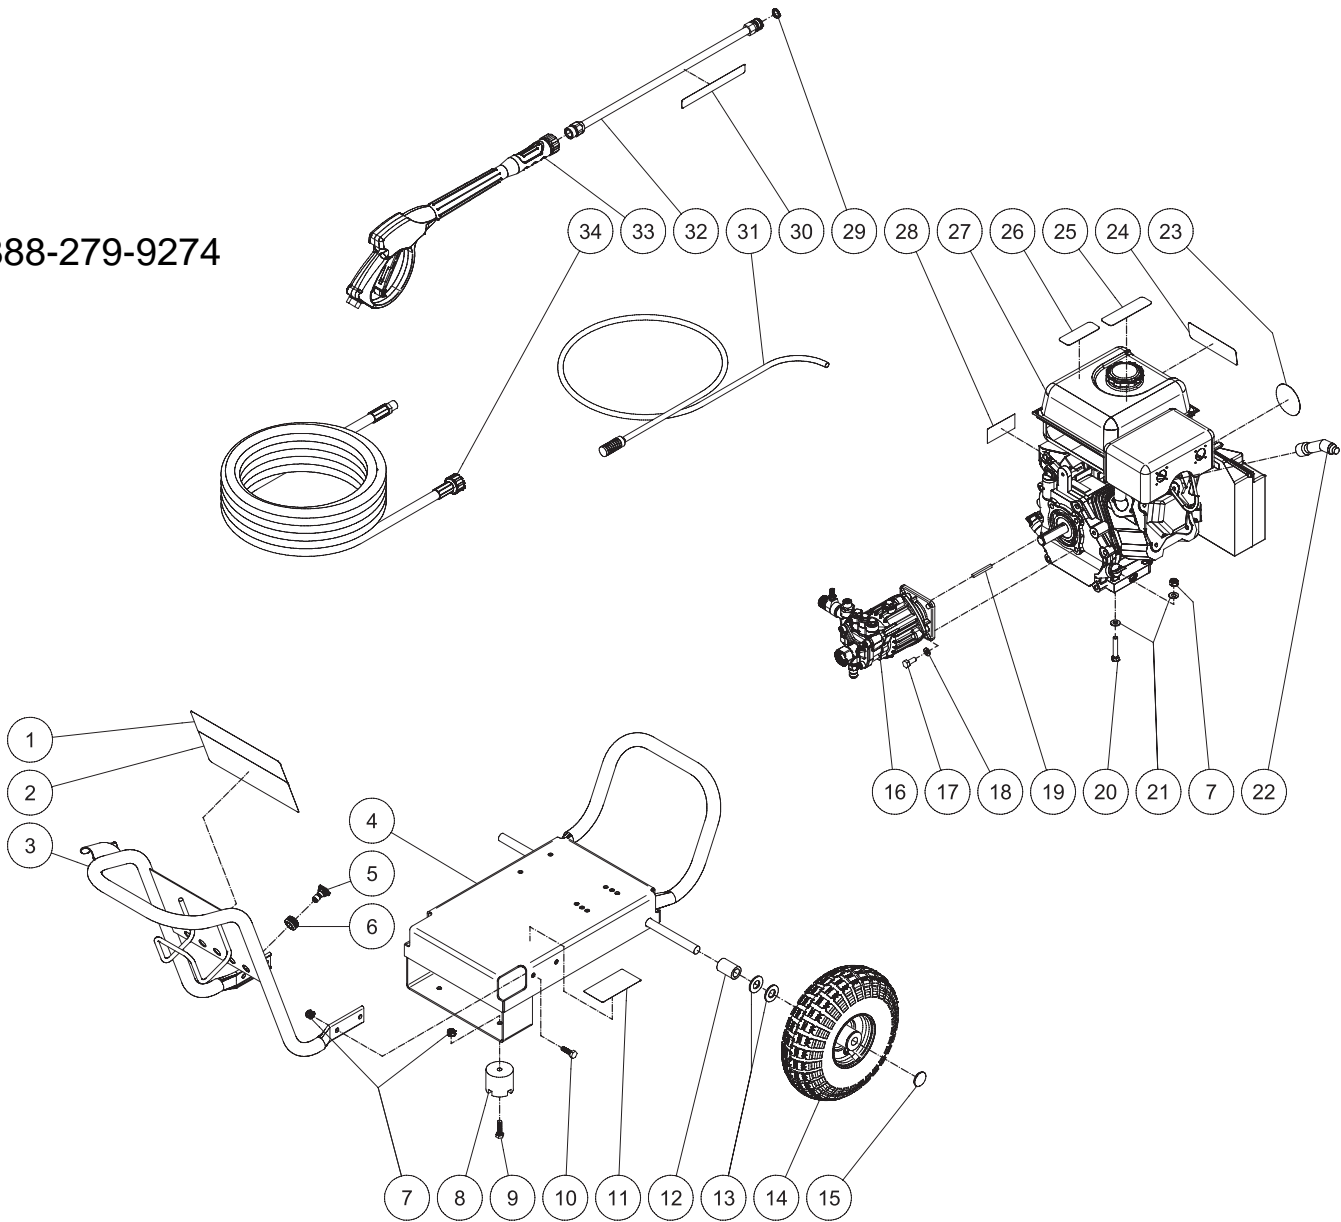


CM-2600-0MLB-CMLB 043010-PJH

CM-2600-OMLB_CMLB 043010-PJH			
FRAME ASSEMBLY			
ITEM	DESCRIPTION	PART #	QTY
1	DECAL - CHOREMASTER 2600, 3000	34-2150	1
2	DECAL - WARNING/CAUTION/OPERATION (SEE 34-9014)	N/A	1
3	HANDLE	7-0194A01	1
4	BASEPLATE	5-0253A53	1
5	NOZZLE	18-0388	1
-	NOZZLE	18-0386	1
-	NOZZLE	18-0390	1
6	GROMMET	33-0001	5
7	LOCKNUT	30-0157	10
8	ISOLATOR	14-0008	2
9	BOLT	27-0068	2
10	BOLT	27-0067	4
11	DECAL- SILVER STICKER	N/A	1
12	SPACER	62-0176	2
13	WASHER	28-0008	4
14	WHEEL	14-0113	2
15	CAP	33-0018	2
16	PUMP	3-0311	1
17	BOLT	27-0091	4
18	LOCKWASHER	29-0007	4
19	KEY	43-0073	1
20	BOLT	27-0070	4
21	WASHER	28-0003	8
22	SPARK PLUG BOOT (REQ. IN CANADA)	45-0168	1
23	DECAL - MI-T-M REWIND 208CC	34-2153	1
24	DECAL - CHOREMASTER UNIT 2600	34-2152	1
25	DECAL - RISK OF BURNS (SEE 34-9014)	N/A	1
26	DECAL - RISK OF FIRE (SEE 34-9014)	N/A	1
27	ENGINE - 49 STATE	1-0166	1
28	ICES DECAL (REQ. IN CANADA)	-	1
29	O-RING	25-0122	1
30	DECAL - RISK OF INJECTION (SEE 34-9014)	N/A	1
31	DETERGENT HOSE	19-0233	1
32	LANCE ASSEMBLY	16-0366	1
33	GUN & WAND - 4000 PSI	16-0441	1
34	HOSE	15-0269	1
35	DECAL SET (NOT SHOWN)	34-9014	1

MOTOR / PUMP ASSEMBLY (3-0311)

For parts Call 888-279-9274

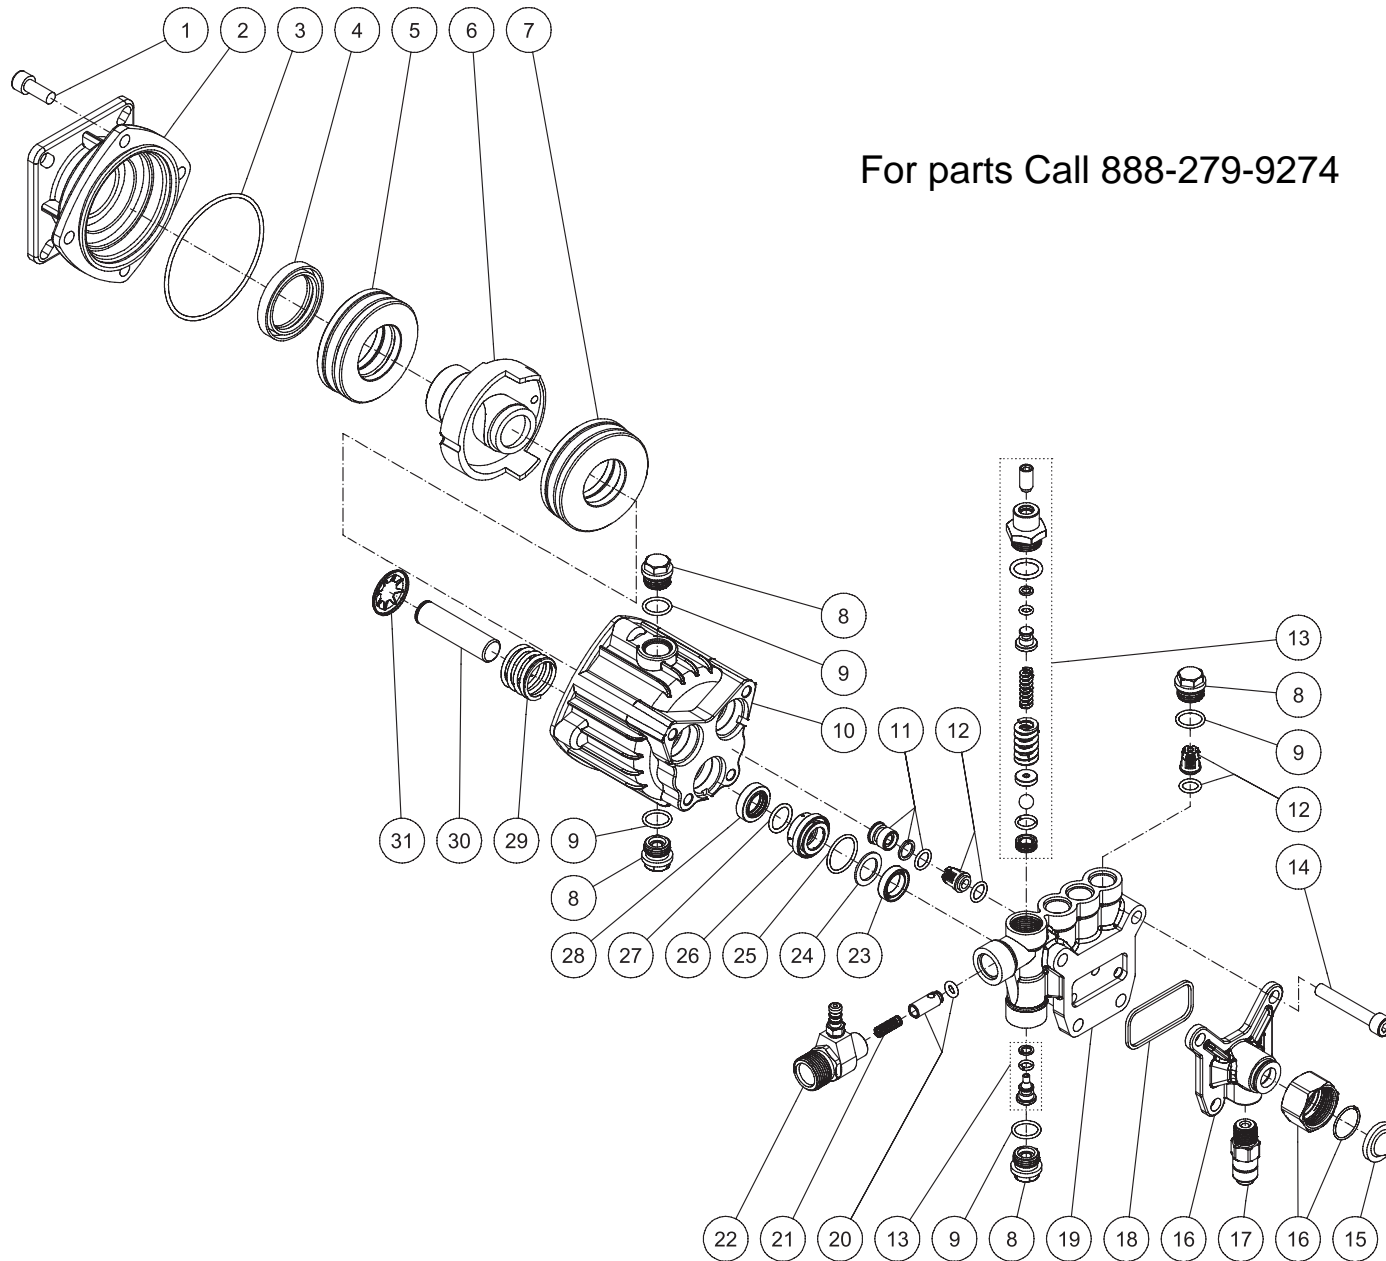

3-0311-031210-PJH

3-0311 031210 PJH			
PUMP ASSEMBLY			
ITEM	DESCRIPTION	PART #	QTY
1	SCREW	27-8432	4
2	FLANGE	46-1330	1
3	O-RING	25-0605	1
4	OIL SEAL	26-0320	1
5	REAR BEARING	N/A	1
6	WOBBLE PLATE ASSY	N/A	1
7	FRONT BEARING	N/A	1
8	PLUG	39-0233	6
9	O-RING	25-0606	6
10	PUMP HOUSING	N/A	1
11	KIT - INLET PLUG ASSY (SEE 70-0512)	N/A	3
12	VALVE ASSY (SEE 70-0516)	N/A	6
13	KIT - UNLOADER COMPLETE	70-0513	1
14	BOLT	27-9569	4
15	FILTER	19-0001	1
16	KIT - INLET ASSY	70-0514	1
17	THERMAL RELIEF VALVE	22-0408	1
18	INLET BODY SEAL	26-0327	1
19	PUMP HEAD	N/A	1
20	KIT - NON-RETURN VALVE	70-0511	1
21	NON-RETURN VALVE SPRING	46-1332	1
22	KIT - OUTLET/BARB ASSY	70-0510	1
23	WATER SEAL (SEE 70-0515)	N/A SEP	3
24	WATER SEAL WASHER (SEE 70-0515)	N/A SEP	3
25	O-RING	N/A SEP	3
26	LOCATING RING	46-1331	3
27	O-RING	N/A SEP	3
28	OIL SEAL	26-0325	3
29	PLUNGER SPRING	N/A	3
30	PISTON	46-1419	3
31	SPRING DISK	N/A	3

For parts Call 888-279-9274

Manufactured by Mi-T-M
8650 Enterprise Drive, Peosta IA 52068
563-556-7484/ Fax 563-556-1235